


**PCT**WORLD INTELLECTUAL PROPERTY ORGANIZATION  
International Bureau

## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<b>(51) International Patent Classification <sup>6</sup> :</b> <b>B04B 1/08, 7/14</b>	<b>A1</b>	<b>(11) International Publication Number:</b> <b>WO 96/25234</b> <b>(43) International Publication Date:</b> 22 August 1996 (22.08.96)
<b>(21) International Application Number:</b> PCT/SE96/00169 <b>(22) International Filing Date:</b> 12 February 1996 (12.02.96) <b>(30) Priority Data:</b> 9500501-3 13 February 1995 (13.02.95) SE <b>(71) Applicant (for all designated States except US):</b> TETRA LAVAL HOLDINGS & FINANCE S.A. [CH/CH]; 70, avenue Général-Guisan, CH-1009 Pully (CH). <b>(72) Inventor; and</b> <b>(75) Inventor/Applicant (for US only):</b> GUSTAFSSON, Bengt-Olof [SE/SE]; Höganloftsvägen 3, S-144 62 Rönninge (SE). <b>(74) Agent:</b> STRANDÉN, Lars-Erik; Alfa Laval AB, S-147 80 Tumba (SE).		<b>(81) Designated States:</b> JP, US, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).  <b>Published</b> With international search report. With amended claims.

**(54) Title:** INLET DEVICE FOR A CENTRIFUGAL SEPARATOR**(57) Abstract**

Inlet device for a centrifugal separator, which easily can be modified so that the centrifugal separator by simple means can get a broadened range of applications. To obtain this an inlet device according to the invention is composed by a first part (11), which forms a first portion (15) of the inlet channel with an inlet (16) and an outlet (17), located radially outside this, and a second part (12), which is formed by a frusto conical flowing disc and is arranged between the outlet (17) of the first portion (15) of the inlet channel and a stack of separation discs (24) in a separation chamber (6), towards which a second part (12) delimits at least one second portion (18) of the inlet channel, which is connected to the outlet (17) of the first portion (15) of the inlet channel and opens in at least one opening (19) arranged in the flowing disc, which is located at a radial distance from the outlet of the first portion (15) of the inlet channel, and the second portion (18) of the inlet channel having a zone (20) surrounding the rotation axis, which is located radially between the outlet (17) of the first portion (15) of the inlet channel and said opening (19), and essentially is out of obstacles for liquid to flow in circumferential direction relative to the inlet device.

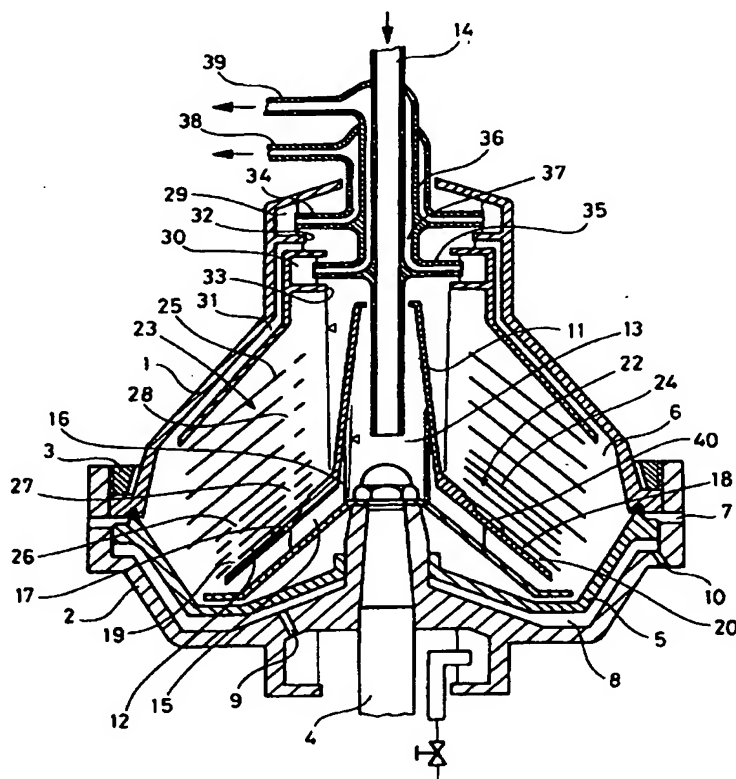

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AM	Armenia	GB	United Kingdom	MW	Malawi
AT	Austria	GE	Georgia	MX	Mexico
AU	Australia	GN	Guinea	NE	Niger
BB	Barbados	GR	Greece	NL	Netherlands
BE	Belgium	HU	Hungary	NO	Norway
BF	Burkina Faso	IE	Ireland	NZ	New Zealand
BG	Bulgaria	IT	Italy	PL	Poland
BJ	Benin	JP	Japan	PT	Portugal
BR	Brazil	KE	Kenya	RO	Romania
BY	Belarus	KG	Kyrgyzstan	RU	Russian Federation
CA	Canada	KP	Democratic People's Republic of Korea	SD	Sudan
CF	Central African Republic	KR	Republic of Korea	SE	Sweden
CG	Congo	KZ	Kazakhstan	SG	Singapore
CH	Switzerland	LI	Liechtenstein	SI	Slovenia
CI	Côte d'Ivoire	LK	Sri Lanka	SK	Slovakia
CM	Cameroon	LR	Liberia	SN	Senegal
CN	China	LT	Lithuania	SZ	Swaziland
CS	Czechoslovakia	LU	Luxembourg	TD	Chad
CZ	Czech Republic	LV	Latvia	TG	Togo
DE	Germany	MC	Monaco	TJ	Tajikistan
DK	Denmark	MD	Republic of Moldova	TT	Trinidad and Tobago
EE	Estonia	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	UG	Uganda
FI	Finland	MN	Mongolia	US	United States of America
FR	France	MR	Mauritania	UZ	Uzbekistan
GA	Gabon			VN	Viet Nam

Inlet device for a centrifugal separator

The present invention concerns an inlet device for a centrifugal separator, the rotor of which being rotatable in a predetermined rotational direction around a rotation axis and delimiting an inlet chamber for a liquid mixture of components, which are to be separated, and a separation chamber, which surrounds the inlet chamber and is delimited from the same by means of a first part of an inlet device, and which communicates with the inlet chamber via at least one inlet channel formed in the inlet device, the inlet channel having an opening in the separation chamber located at a predetermined distance from the rotational axis. A first portion of the inlet channel is formed in the first part of the inlet device with a radial inner inlet and a radial outside this located outlet. The rotor further delimits an outlet chamber for a component separated during operation in the separation chamber. At least one stack of frusto conical separation discs arranged at a distance from each other is placed in the separation chamber coaxially with the rotor. The separation discs form between themselves interspaces, which communicate with said inner channel via at least one distributing channel.

A centrifugal separator, which is provided with such an inlet device is shown in US 3 482 771.

Centrifugal separators of this kind are used for centrifugal treating of liquid mixtures of components, the difference in densities and concentrations of which in the supplied mixture vary case by case. Many details in such a centrifugal separator have to be specially designed for a relatively limited number of applica-

tions, to be able to achieve a satisfactory separation result. This means that an often very expensive part has to exist in a great number of variants. One such detail is constituted by the inlet device described above,  
5 which for the application at hand shall be so designed that the supplied liquid mixture during operation is brought to flow in a wanted manner to the opening of the inlet channel, which is located at a radial level in the separation chamber suitable for the application at hand,  
10 whereas the inlet chamber is kept filled up radially inwardly to such a level that the supplied liquid mixture can be received gently in the inlet chamber and gently be entrained in the rotation of the rotor.

15 The object of the present invention is to accomplish an inlet device for a centrifugal separator, which makes it possible by simple and cost saving means to be able to modify a centrifugal separator so that it can be used in a broad range of applications.

20 According to the present invention you accomplish this by designing an inlet device of the kind initially described with a second part too, which is formed by a frusto conical flowing disc and is arranged on a side of  
25 the first part, which is turned towards the separation chamber, between the outlet of the first portion of the inlet channel and the stack of separation discs. The flowing disc is arranged to delimit at least one second portion of the inlet channel towards the separation  
30 chamber, which second portion being connected to the first portion of the inlet channel at the outlet of it and opens into the separation chamber via at least one opening, which is arranged in the flowing disc and located at the predetermined radial distance from the  
35 rotation axis and at a radial distance from the outlet

of the first portion of the inlet channel. The second portion of the inlet channel has a zone surrounding the rotation axis, which is located radially between the outlet of the first portion of the inlet channel and said opening, and which essentially is out of obstacles for a liquid mixture present during operation in this zone to flow in circumferential direction relative to the inlet device, the second portion of the inlet channel being so arranged that essentially all liquid mixture of components during operation flow through the same towards the opening.

Hereby, only the second part of the inlet device, which is formed by an easily modifiable conical flowing disc, possibly need to be modified to adapt the inlet device to the application at hand.

In a preferred embodiment of the invention the first and the second parts of the inlet device are disconnectably joined.

Suitably, the second portion of the inlet channel is delimited by the second part together with the first part and open radially outwardly towards the separation chamber to reduce the danger of clogging by heavy particles or fibres possibly contained in the supplied liquid mixture.

Radially inwardly the second portion of the inlet channel preferably is closed to avoid that unseparated mixture of components leak to a radially inner portion of the separation chamber and contaminates a separated specifically light component, which has been accumulated in this portion of the separation chamber.

In a special embodiment of the invention the opening of the second portion of the inner channel is located radially outside the outlet of the first portion of the inlet channel. Seen in the rotational direction the opening of the second portion of the inlet channel is then preferably located behind the outlet of the first portion of the inlet channel.

In another embodiment of the invention the second portion of the inlet channel comprises a further zone, which is located radially between the outlet of the first portion of the inlet channel and said opening. In this zone means are arranged fixedly connected to the second part of the inlet device to entrain the liquid mixture flowing during operation into this second portion of the inlet channel in the rotation of the rotor.

Hereby, you can by simple means modify the inlet device so that the flow capacity of it can be increased when needed and an even broader range of applications for the centrifugal separator can be achieved without the number of expensive details being increased.

The invention will be described in the following more closely with reference to the attached drawings, in which

figure 1 schematically shows an axial section through a rotor in a centrifugal separator with an inlet device according to the invention, and

figure 2 shows a portion of the inlet device according to the invention in the centrifugal separator according to figure 1 seen from underneath.

The rotor shown in figure 1 comprises an upper part 1 and a lower part 2, which are held together by a locking ring 3. The rotor is supported by a driving shaft 4 which is connected to the lower part 2. Inside the rotor a valve slide 5 is arranged axially movable in the lower part 2. The valve slide 5 delimits via the upper part 1 a separation chamber 6 and is arranged to open and close an annular gap at the largest periphery of the separation chamber 6 between the separation chamber 6 and the outlet opening 7 to periodically discharge a component, which during operation has been separated out of a liquid mixture supplied to the rotor and has been accumulated at the periphery of the separation chamber 6. The valve slide 5 delimits together with the lower part 2 a closing chamber 8, which is provided with an inlet 9 and a throttled outlet 10 for a closing liquid. Centrally in the rotor an inlet device is arranged, which is composed by a first part 11 and a second part 12. The first part 11 surrounds and delimits an inlet chamber 13 from the separation chamber 6. Centrally in the inlet chamber 13 a stationary inlet tube 14 is arranged. The first part 11 forms a first portion 15 of the inlet channel, which is provided with entraining wings, has a radially inner inlet 16 in the inlet chamber 13 and a radially outside this located outlet 17.

In the example shown in figure 1 the first portion 15 of the inlet channel is open radially outwardly via a passage under the first part 11. Hereby, specific heavy particles or fibres, which possibly are contained in the supplied liquid mixture and are separated out in the first portion 15 of the first inlet channel freely can flow radially outwardly through this passage and further out towards the radially outermost periphery of

the separation chamber 6. In order not to have the main liquid flow taking place through the passage but through the outlet 17 of the first portion 15 of the inlet channel the passage surrounds the rotation axis and is essentially out of obstacles for a liquid present in the passage to flow in circumferential direction relative to the inlet device whereby a resistance against liquid flow radially through the passage is created. However, the first portion 15 of the inlet channel can alternatively be closed radially outwardly within the scope of the present invention.

The second part 12 of the inlet device, which is formed by an easily modifiable flowing disc, is arranged on the side of the first part 11 of the inlet device, which is turned towards the separation chamber 6. The second part 12 delimits together with the first part 11 at least one second portion 18 of the inlet channel, which is connected to the first portion 15 of the inlet channel at its outlet 17 and opens in one or more openings 19 arranged in the flowing disc at the above mentioned predetermined radially distance from the rotational axis. The second part 12 of the inlet device is then preferably disconnectably joint to the first part 11 but the two parts of the inlet device can also be permanently joint together.

The openings 19 shown as examples in the figure consist of holes arranged in the flowing disc but the openings 19 can also consist of the radially outer edge of the flowing disc or recesses extending radially inwardly from this radially outer edge. In the shown example the openings 19 are located radially outside the outlet 17 of the first portion 15 of the inlet channel but they can also be located radially inside the outlet 17.



Between the outlet 17 of the first portion 15 of the inlet channel and the openings 19 of the second portion of the channel. The second portion 18 of the inlet channel has a zone 20 surrounding the rotational axis, which essentially is out of obstacles for a liquid mixture present during the operation in this zone to flow in circumferential direction relative to the inlet device and a further zone, which extends radially, and in which means are arranged fixedly connected to the second part of the inner device to entrain the liquid mixture flowing during operation into this second portion of the inlet channel in the rotation of the rotor.

In the example shown in figure 1 two stacks 22 and 23 of a number of frusto conical separation discs 24, 25 respectively, are arranged on each other inside the separation chamber 6 coaxially with the rotation axis. The separation discs in each stack are preferably identical.

The separation discs 24 in the in the figure shown lower stack 22 have holes located aligned with each other and the openings 19 of the second portion of the inlet channel, which together form a distributing channel 26 communicating with the second portion 18 of the inlet channel. The distributing channel 26 can alternatively be formed by the radially outer edge of the separation disc 24 or by recesses extending from this edge.

At a radial level at a distance from the radial level of the distributing channel 26 these separation discs 24 have holes located axially aligned with each other, which together form an outlet channel 27 for a liquid, out of which specifically heavy components have been

preseparated in the lower stack 22 of the separation discs 24.

5 The separation discs 25 in the upper stack 23 have axially aligned with each other and with the outlet channel 27 in the first stack 22 located holes, which together form a distributing channel 28 for distributing liquid flowing out of the outlet channel 27 in the first stack 22 out into the interspaces between the separation  
10 discs 25 in the upper stack 23.

The upper part forms in its in the figure shown upper end a central outlet chamber 29 for discharge of a specifically heavy liquid component separated during  
15 operation and a central outlet chamber 30 for discharge of a specifically light liquid component separated during operation. The first mentioned outlet chamber 29 communicates with the separation chamber 6 via an outlet channel 31 formed in the upper part 1 and an overflow  
20 outlet 32. The channel 31 formed in the upper part 1 opens in an radially inner portion of the separation chamber 6. The last mentioned outlet chamber 30 communicates via an overflow outlet 33 with a central portion of the separation chamber 6.

25 In the two outlet chambers 29 and 30 a stationary discharge device 34 and 35, respectively, are arranged in a known manner to discharge a heavy and a light separated liquid component, respectively, through internal discharge channels 36 and 37, respectively, towards connected outlets 38 and 39, respectively.  
30

Figure 2 shows the second part 12 of the inlet device in the shape of a frusto conical flowing disc seen from  
35 below. An arrow shows the rotational direction of the

rotor and thus the rotational direction of the flowing disc during operation.

5 The second part 12 on its side underneath has a number of straight elongated entraining means 40, which are equally distributed around the centre of the flowing disc and extend radially through a radially inner zone of a second part 12 of the inlet device. At a pre-determined radial level, which in the example shown in  
10 the figure is located at a radially outer portion of the second part of the inlet device, the same is provided with holes, which form openings 19 of the second portion 18 of the inlet channel shown in figure 1. The position of the outlet 17 of the first portion 15 of the inlet  
15 channel shown in figure 1 relative to the second portion is indicated with circles, which are drawn with dotted lines. Seen in the rotational direction the openings 19 are located behind the outlet 17.

20 A centrifugal separator, which is designed according to the invention, functions in the following way:

Upon start of the centrifugal separator the rotor is brought to rotate and the separation chamber 6 is closed  
25 by supplying closing liquid to the closing chamber 8 through the inlet 9. Thereafter, the liquid mixture of components, which are to be centrifugally treated, is supplied to the inlet chamber 13 via the inlet tube 14.

30 From the inlet chamber 13 the supplied liquid flows radially outwardly through the first portion 15 of the inlet channel arranged in the first part 11 where it is entrained in the rotation of the rotor by means of wings arranged on the first part 11 and via the outlet 17  
35 further into the second portion 18 of the inlet channel

arranged in the second part 12. The liquid then flows radially outwardly first through a zone 21, in which means are arranged to further entrain the liquid while flowing radially outwardly, and then to flow further  
5 radially outwardly through a zone 20 surrounding the rotation axis, which essentially is out of obstacles for a liquid mixture present during operation in this zone to flow in circumferential direction relative to the inlet device. While flowing radially outwardly towards  
10 the opening 19 the liquid will strive to rotate with a lower angular speed than the rotor and thereby create a resistance for a flow radially through this zone.

Hereby, a counter pressure can be maintained in the  
15 inlet device, which makes it possible that the inlet chamber can be kept filled up radially inwardly to a small radius and thus accomplish an inlet, which is gentle to the supplied liquid and does not diminish the possibility to a satisfying separation result at a  
20 certain flow through the centrifugal separator, without the need of decreasing the radius of other liquid levels in the centrifugal separator.

If the supplied liquid mixture contains specifically  
25 heavy particles or fibres some of them will be separated and accumulated on the under side of the second part 12 and flow radially outwardly along the same. By the fact that the second portion 18 of the inlet channel is open radially outwardly the particles or fibres separated in  
30 this way can flow further radially outwardly and be collected at the radially outermost part of the separation chamber 6 from where they can be periodically discharged through the outlet openings 7. Hereby, the danger of having the centrifugal separator clogged  
35 decreases. The radially outwardly directed flow is

promoted by the location of the openings 19 seen in the rotational direction behind the outlet 17. The layer of particles or fibres accumulated on the underside of the second part 12 will namely thereby be influenced by a  
5 radially outwardly directed shearing force from the flow in a so called "Ekman-layer" cooperating with the centrifugal force.

The liquid mixture, out of which particles or fibres  
10 have been separated in this manner, flows via the openings 19 further into the distributing channel 26 in the lower stack 22 of separation discs 24 and is distributed into the interspaces between these separation discs 24.

15 In these interspaces the liquid flows radially inwardly towards the outlet channel 27, the remaining specifically heavy particles and fibres being separated. In order to prevent liquid from flowing radially inwardly  
20 passing the outlet channel and possibly leak over to the outlet chamber 30 for separated specific light liquid component and contaminate this the separation discs 24 can be designed with a zone, located radially inside the outlet channel 27, which surrounds the rotational axis  
25 and is essentially out of obstacles for a liquid mixture present during operation in this zone to flow in circumferential direction relative to the rotor. Hereby, a resistance is created against flow radially inwardly through this zone.

30 From the outlet channel 27 the liquid cleansed of particles or fibres flows into the distributing channel 28 in the upper stack 23 of separation discs 25 and is distributed out into the interspaces between these  
35 discs. In these interspaces the flow takes place

radially outwardly while a specific light liquid component is separated from a specific heavy liquid component.

5 During separation the specific heavier liquid component flows radially outwardly and is accumulated in the radial outer portion of the separation chamber 6, while the specific lighter liquid component flows radially inwardly and is collected in the radially innermost  
10 portion of the separation chamber 6.

The specific heavier liquid component flows out of the separation chamber 6 through the outlet channel 31 and via the overflow outlet 32 into the outlet chamber 29.  
15 Out of the outlet chamber 29 the liquid is discharged through internal discharge channels 36 in a stationary discharge device 34 out towards an outlet 38. The separated specific lighter liquid component flows out of the separation chamber 6 via an overflow outlet 33 into the  
20 outlet chamber 30, from which it is discharged through internal discharge channels 37 in a stationary discharge device 35 towards an outlet 39.

In order to achieve a wanted separation result the flows  
25 of liquid shall be brought to take place in an intended manner in the centrifugal separator at the premises at hand in the application in question.

By designing an inlet device for a centrifugal separator  
30 according to the present invention it can by simple means be modified and adapted to the premises of the application in question.

Claims

1. Inlet device for a centrifugal separator, the rotor of which being rotatable in a predetermined rotational direction around a rotational axis and delimits
- 5
- an inlet chamber (13) for a liquid mixture of components, which are to be separated,
- 10
- a separation chamber (6) which surrounds the inlet chamber (13) and is delimited from the inlet chamber (13) by means of a first part (11) of an
- inlet device and which communicates with this inlet
- 15
- chamber (13) via at least one inlet channel formed in the inlet device, the inlet channel having an opening in the separation chamber (6) located at a predetermined distance from the rotational axis, and a portion of the inlet channel being formed in the first part with a
- 20
- radial inner inlet (16) and a radially outside this located outlet (17), and
- at least one outlet chamber (29, 30) for a component separated during separation in the separation
- 25
- chamber (6),
- whereby at least one stack (22) of frusto conical separation discs (24) arranged at a distance from each other is located in the separation chamber (6)
- 30
- coaxially with the rotor, which separation discs (24) form between themselves interspaces, which communicate with said inlet channel via at least one distributing channel (26),
- 35
- c h a r a c t e r i z e d i n

that the inlet device has a second part (12) too, which is formed by a frusto conical flowing disc and is arranged on a side of the first part (11), which is turned towards the separation chamber (6), between the outlet (17) of the first portion (15) of the inlet channel and the stack of separation discs (24) and is arranged to delimit towards the separation chamber (6) at least one second portion (18) of the inlet channel, which is connected to the first portion (15) of the inlet channel at the outlet (17) of it, and opens in at least one opening (19) arranged in the flowing disc, which is located at the above mentioned predetermined radial distance from the rotational axis and at a radial distance from the outlet (17) of the first portion (15) of the inlet channel, and which second portion (18) of the inlet channel has a zone (20) surrounding the rotational axis, which is located radially between the outlet (17) of the first portion (15) of the inlet channel and said opening (19), and which essentially is out of obstacles for a liquid mixture present during operation in this zone (20) to flow in circumferential direction relative to the inlet device, the second portion (18) of the inlet channel being so arranged that essentially all liquid mixture of components during operation flows through the same towards the opening (19).

2. Inlet device according to claim 1, c h a r a c -  
t e r i z e d i n that the first and the second part  
(11, 12 respectively) are disconnectably joint.

3. Inlet device according to claim 1 or 2, c h a -  
r a c t e r i z e d i n that the second part (12) is  
arranged to delimit together with the first part (11)  
the second portion (18) of the inlet channel.



4. Inlet device according to claim 1, 2 or 3,  
c h a r a c t e r i z e d i n that the second portion  
(18) of the inlet channel is open radially outwardly  
towards the separation chamber (6).

5

5. Inlet device according to any of the previous  
claims, c h a r a c t e r i z e d i n that the second  
portion (18) of the inlet channel is closed radially  
inwardly towards the separation chamber (6).

10

6. Inlet device according to any of the previous  
claims, c h a r a c t e r i z e d i n that the opening  
(19) of the second portion (18) of the inlet channel is  
located radially outside the outlet (17) of the first  
portion (15) of the inlet channel.

15

7. Inlet device according to claim 6, c h a r a c -  
t e r i z e d i n that the opening (19) of the second  
portion (18) of the inlet channel seen in the rotational  
direction is located behind the outlet (17) of the first  
portion (15) of the inlet channel.

20

8. Inlet device according to any of the previous  
claims, c h a r a c t e r i z e d i n that the second  
portion (18) of the inlet channel also comprises a  
further zone (21), which is located radially between the  
outlet (17) of the first portion (15) of the inlet  
channel and said opening (19) and in which zone (21)  
means (40) is arranged fixedly joint to the second part  
(12) of the inlet device to entrain in the rotation of  
the rotor the liquid mixture flowing during operation  
into this second portion (18) of the inlet channel.

25

30

## AMENDED CLAIMS

[received by the International Bureau on 8 July 1996 (08.07.96);  
original claim 1 amended; remaining claims unchanged (3 pages)]

1. Inlet device for a centrifugal separator, the rotor  
of which being rotatable in a predetermined rotational  
5 direction around a rotational axis and delimits
- an inlet chamber (13) for a liquid mixture of  
components, which are to be separated,
  - 10 - a separation chamber (6), which surrounds the inlet  
chamber (13) and is delimited from the inlet chamber  
(13) by means of a first part (11) of the inlet  
device, and which communicates with this inlet  
15 chamber (13) via at least one inlet channel formed in  
the inlet device, the inlet channel having an opening  
in the separation chamber (6) located at a  
predetermined distance from the rotational axis, and  
a portion of the inlet channel being formed in the  
20 first part with a radial inner inlet (16) and a  
radially outside this located outlet (17), and
  - at least one outlet chamber (29, 30) for a component  
separated during separation in the separation  
chamber (6),
  - 25
- whereby at least one stack (22) of frusto conical  
separation discs (24) arranged at a distance from  
each other is located in the separation chamber (6)  
coaxially with the rotor, which separation discs (24)  
30 form between themselves interspaces, which communicate  
with said inlet channel via at least one distributing  
channel (26),

c h a r a c t e r i z e d i n

that the inlet device has a second part (12) too, which is formed by a frusto conical flowing disc and is arranged on a side of the first part (11), which is turned towards the separation chamber (6), between the outlet (17) of the first portion (15) of the inlet channel and the stack of separation discs (24) and is arranged to delimit towards the separation chamber (6) at least one second portion (18) of the inlet channel, which is connected to the first portion (15) of the inlet channel at the outlet (17) of it, and opens in at least one opening (19) arranged in the flowing disc, which is located at the above mentioned predetermined radial distance from the rotational axis and at a radial distance from the outlet (17) of the first portion (15) of the inlet channel, and which second portion (18) of the inlet channel has a zone (20) surrounding the rotational axis, which is located radially between the outlet (17) of the first portion (15) of the inlet channel and said opening (19), and which essentially is out of obstacles for a liquid mixture present during operation in this zone (20) to flow in circumferential direction relative to the inlet device, the second portion (18) of the inlet channel being so arranged that essentially all liquid mixture of components during operation flows through the same towards the opening (19).

2. Inlet device according to claim 1, c h a r a c -  
t e r i z e d i n that the first and the second part  
(11, 12 respectively) are disconnectably joint.

3. Inlet device according to claim 1 or 2, c h a -  
r a c t e r i z e d i n that the second part (12) is  
arranged to delimit together with the first part (11)  
the second portion (18) of the inlet channel.

4. Inlet device according to claim 1, 2 or 3, characterized in that the second portion (18) of the inlet channel is open radially outwardly towards the separation chamber (6).

5

5. Inlet device according to any of the previous claims, characterized in that the second portion (18) of the inlet channel is closed radially inwardly towards the separation chamber (6).

10

6. Inlet device according to any of the previous claims, characterized in that the opening (19) of the second portion (18) of the inlet channel is located radially outside the outlet (17) of the first portion (15) of the inlet channel.

15

7. Inlet device according to claim 6, characterized in that the opening (19) of the second portion (18) of the inlet channel seen in the rotational direction is located behind the outlet (17) of the first portion (15) of the inlet channel.

20

8. Inlet device according to any of the previous claims, characterized in that the second portion (18) of the inlet channel also comprises a further zone (21), which is located radially between the outlet (17) of the first portion (15) of the inlet channel and said opening (19) and in which zone (21) means (40) is arranged fixedly joint to the second part (12) of the inlet device to entrain in the rotation of the rotor the liquid mixture flowing during operation into this second portion (18) of the inlet channel.

25

30

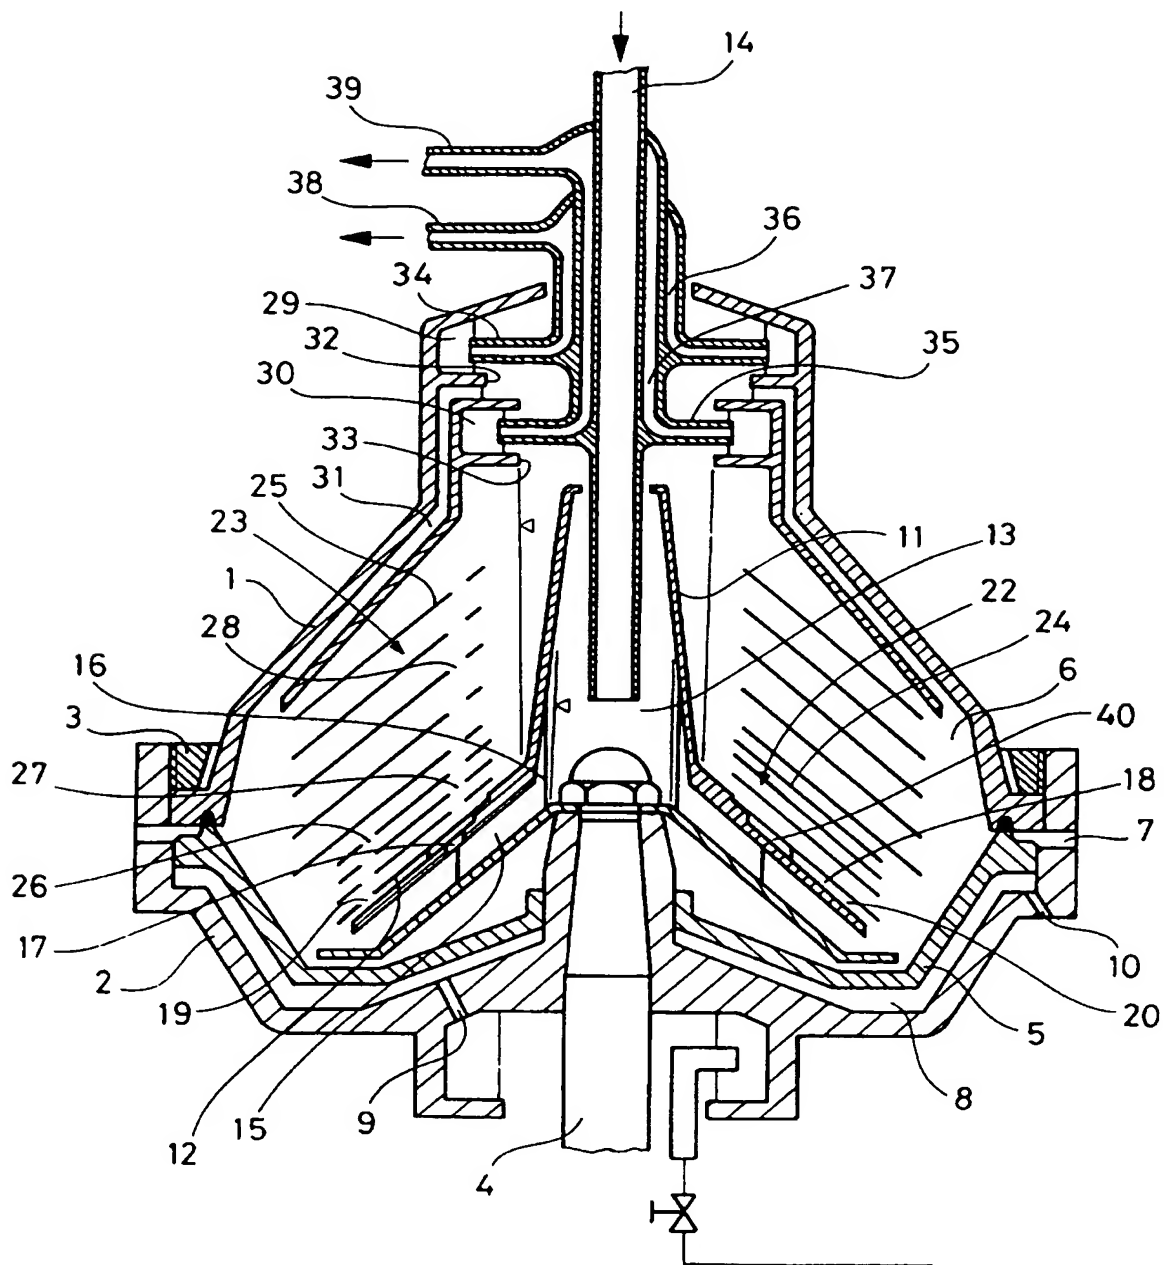
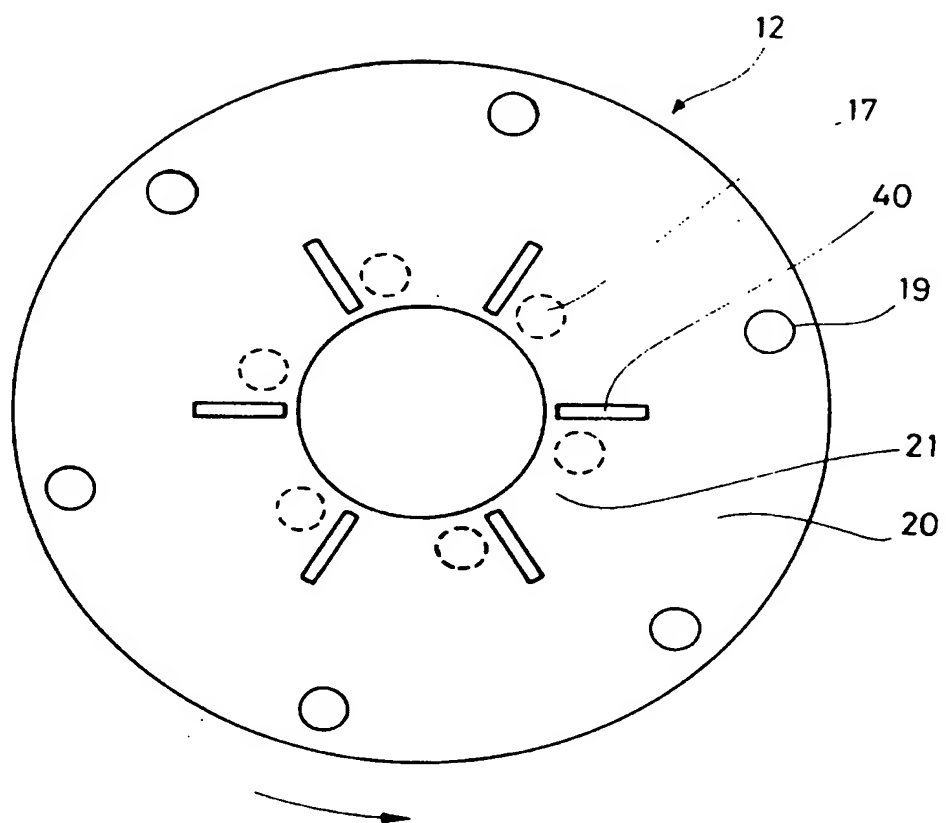


Fig.1

Fig. 2

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE 96/00169

## A. CLASSIFICATION OF SUBJECT MATTER

IPC6: B04B 1/08, B04B 7/14

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC6: B04B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 9325314 A1 (ALFA LAVAL SEPARATION AB), 23 December 1993 (23.12.93), figures 1,2, claims 1-8, abstract  --	1
A	US 4142671 A (JURY F. IVIN ET AL), 6 March 1979 (06.03.79), figure 1, abstract  --	1
A	US 3482771 A (HENRIC WILHELM THYLEFORS), 9 December 1969 (09.12.69), figure 1, abstract  -- -----	1

☐ Further documents are listed in the continuation of Box C.☒ See patent family annex.

## \* Special categories of cited documents:

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

7 May 1996

Date of mailing of the international search report

09 -05- 1996

Name and mailing address of the ISA:  
Swedish Patent Office  
Box 5055, S-102 42 STOCKHOLM  
Facsimile No. +46 8 666 02 86

Authorized officer

Johan von Döbeln  
Telephone No. +46 8 782 25 00

**INTERNATIONAL SEARCH REPORT**

Information on patent family members

01/04/96

International application No.

PCT/SE 96/00169

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO-A1- 9325314	23/12/93	NONE	
US-A- 4142671	06/03/79	DE-A, C, C 2815603 FR-A, B- 2390210 GB-A- 1585142 JP-C- 1093854 JP-A- 54001459 JP-B- 56037869 SE-B, C- 437619 SE-A- 7805438	16/11/78 08/12/78 25/02/81 27/04/82 08/01/79 02/09/81 11/03/85 12/11/78
US-A- 3482771	09/12/69	DE-A- 1657271 GB-A- 1180317	11/02/71 04/02/70